

“Highly Versatile”

The **OTW VersaHone Horizontal** honing machines provide the flexibility, value, and ease of use ideal for those who process a broad range of parts.

[Standard Features]

- Programmable Automatic Tool Expansion System
- Universal Chain-type Fixturing System
- Tool Support Rest
- 1.25” Diameter Hardened Steel Ways
- Touchscreen PLC Operator Controls
- Part Program Storage
- Magnetic Filtration System

[Options]

- Large Selection of Vitrified & Metalbond Abrasives
- 2M or 4.5M Stroke Lengths
- Special Electrical System Options
- Paper Media Coolant Filtration System
- CE Certification




Capacities/Technical Specifications

[OTW- VersaHone Horizontal]

I.D. Capacity	1.98- 22 inches (50-560 mm) *
O.D. Capacity	24 inches (610 mm) max
Stroke Capacities	6.5' (2 M) 13.0' (4M)
Stroke Power	2.0 HP (1.5 KW)
Spindle Drive	5.0 HP (3,7 KW)
Spindle Speeds	20-300 RPM Infinitely Variable
Stroke Rate	5-90 FPM (1,5-27,4 M/MIN) Infinitely Variable
Electrical System	480V / 3PH / 60 Hz **

Turnkey Solutions

Please ask about OTW's complete line of tooling, abrasives & consumables.

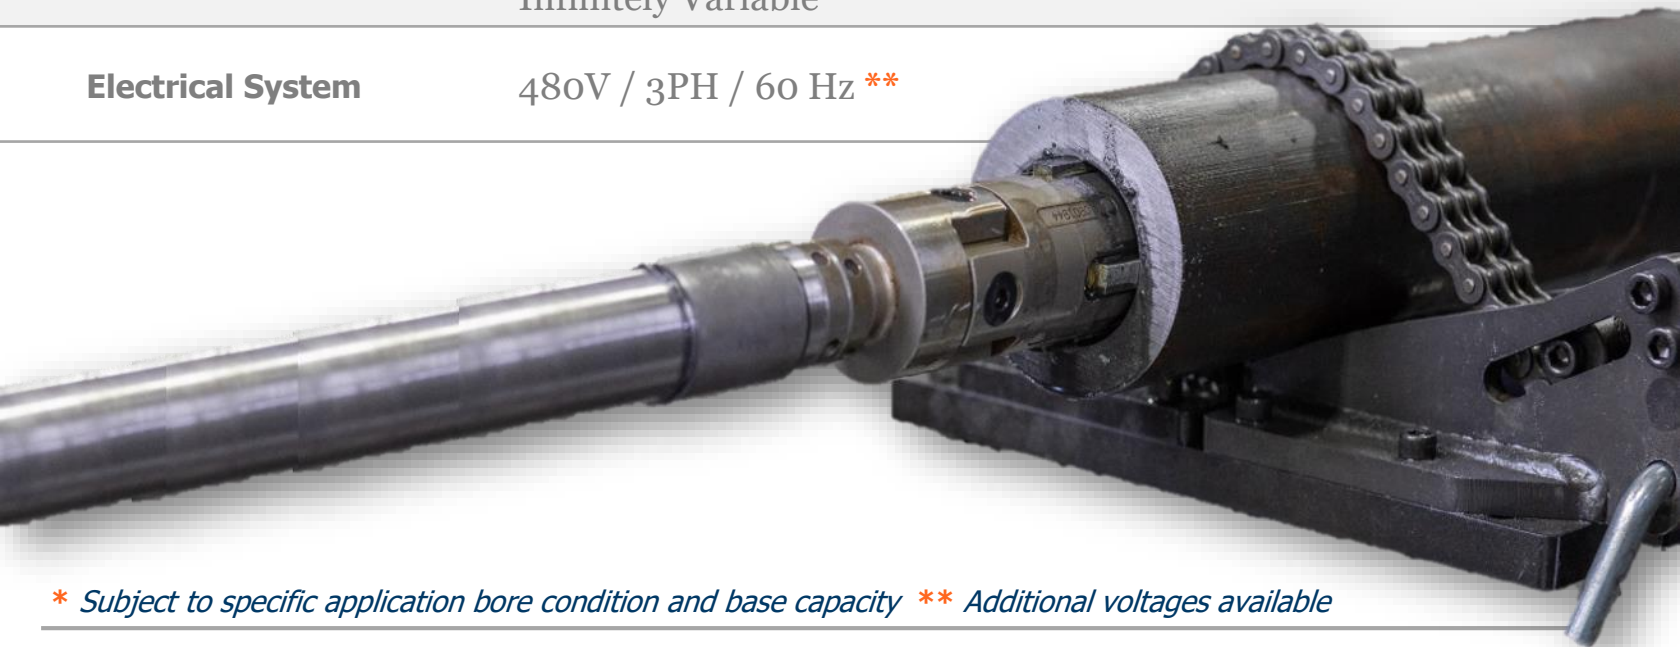

* Subject to specific application bore condition and base capacity ** Additional voltages available



Innungstraße 32
50354 Hürth-Gleuel

Telefon: 02233 / 39220
Telefax: 02233 / 392241
Internet: www.nepa.de
E-mail: info@nepa.de